


COAXIAL CATV CABLES

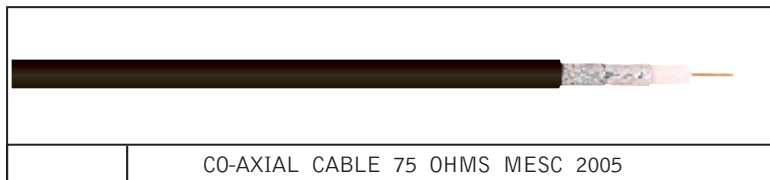

LEGEND:		
BC	⇒	Bare Copper
TC	⇒	Tinned Copper
CUWLD	⇒	Copper Covered Steel (copperweld)
PE	⇒	Solid Polyethylene
FPE	⇒	Cellular (Foam) Polyethylene
AL	⇒	Aluminum
AMT	⇒	Aluminum Mylar Tape
PVC	⇒	Polyvinyl Chloride

RG-59/U

Packing length and MESC CODE	Approx Weight	Conductor				Insulation		Shield	Jacket		Nom. Imp.	Nom. Cap.	Nom. vel of prop.	Nominal Attenuation	
	Kg.	Material	AWG	Strands X diameter No. x mm	Nom. D.C. Res. at 200C ohm/Km	Matl	Core Dia. mm	Material & coverage Nom. shield resistance	Matl	Dia. mm	 ohm	pF/m	%	MHz	db/ 100m
1000 ft in reel 2133-01CRG59U-U3BK6-00 1000 m in Drum 2133-01CRG59U-U3BK8-00 Order No. 21001	11	CUWLD	20	1 X 0.81	147.2	FPE	3.71	100% AMT and 67% Al wire braid 36.3 Ω / Km	PVC BLACK	6.16	75	53.1	82	1	2.0
	10													3.3	
	50													5.9	
	100													8.2	
	200													11.5	
	400													16.1	
	700													21.3	
	900													24.3	
	1000													25.9	

RG6/U

Packing length and MESC CODE	Approx Weight	Conductor				Insulation		Shield	Jacket		Nom. Imp.	Nom. Cap.	Nom. vel of prop.	Nominal Attenuation	
	Kg.	Material	AWG	Strands X diameter No. x mm	Nom. D.C. Res. at 200 C ohm/Km	Matl	Core Dia. mm	Material & coverage Nom. shield resistance	Matl	Dia. mm	ohm	pF/m	%	MHz	db/ 100m
1000 ft in reel 2133-01CRG 6/U-U3BK6-00 1000 m in Drum 2133-01CRG 6/U-U3BK8-00 Order No. 21002	14	CUWLD	18	1 X 1.02	93.1	FPE	4.59	100% AMT and 61% Al wire braid 33.1 Ω / Km	PVC BLACK	7.0	75	53.1	82	1	1.6
	10													3.0	
	50													4.9	
	100													6.6	
	200													9.2	
	400													13.1	
	700													17.4	
	900													20.0	
	1000													21.3	

RG11/U

Packing length and MESC CODE	Approx Weight	Conductor				Insulation		Shield	Jacket		Nom. Imp.	Nom. Cap.	Nom. vel of prop.	Nominal Attenuation	
	Kg.	Material	AWG	Strands X diameter No. x mm	Nom. D.C. Res. at 200 C ohm/Km	Matl	Core Dia. mm	Material & coverage Nom. shield resistance ohm/Km	Matl	Dia. mm	ohm	pF/m	%	MHz	db/ 100m
1000 ft in reel 2133-01CRG 11U-U3BK6-00 1000 m in Drum 2133-01CRG 11U-U3BK8-00 Order No. 21003	27	CUWLD	14	1 X 1.63	36.3	FPE	7.25	100% AMT and 61% Al wire braid 23.4 Ω / Km	PVC BLACK	10.3	75	53.1	82	1	1.0
	10													2.0	
	50													3.0	
	100													3.9	
	200													5.6	
	400													7.9	
	700													11.5	
	900													12.5	
1000	13.1														